

It's not rocket science,
but following these
instructions will make
installing your seat covers
a lot easier.

We promise.

PART: 92108

PRODUCT: BUCKET SET

FITMENT DETAILS: 2022 NISSAN FRONTIER

PIECES: (1) DRIVER BACK
(1) PASSENGER BACK
(1) DRIVER BOTTOM
(1) PASSENGER BOTTOM
(2) STRINGLOCK

*Seat Backs & Bottoms have tags signifying Driver or Passenger.
Ensure airbag patch (same side as the TigerTough tag) goes on
the outside edge of the seat.*



*Basically, you break it, we buy it.
Seriously.*

Your new seat covers are covered by a two-year, unconditional, no B.S. warranty.

That means that if you manage to abuse them to a point that they can't perform like they're supposed to within two years of when you bought them, we'll make it right. Depending on what is more practical, we'll either repair or replace the damaged cover.

General care instructions:

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent.
Drip dry or machine tumble dry on a no heat cycle.
Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.

Install Seat Bottom Cover

Slide the seat forward and raising it to the highest position to give you the most amount of working room.

Press tab at the base of the headrest and pull up to remove headrest



Tuck the cover between the plastic trim on the side of the seat.



Unhook the flap behind seat that runs under bottom of the seat



Reach around from the back of the seat and secure the strings tightly using the StringLock device (see next page.) The tighter the strings, the better your cover will fit.




Place the seat bottom cover over the seat bottom with the long flaps towards the front. Push the short flap in between the seat back and bottom.



Take the front flaps of the cover and run them between the plastic trim on the front of the seat and under the seat to the back, making sure it is above the seat mechanisms. From behind the seat, fasten the flaps from the top and the flaps from the bottom together.




Drop the string between the seat cushion and seat frame on the door side of the seat. Drop it down by the seat belt buckle on the other side.

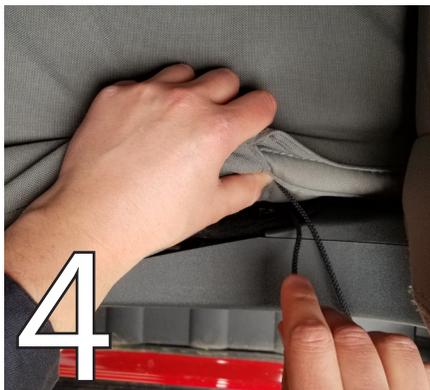

Turn the seat back cover partly inside out. Slide over seat back. Make sure the airbag patch is facing the door.



THE STRINGLOCK

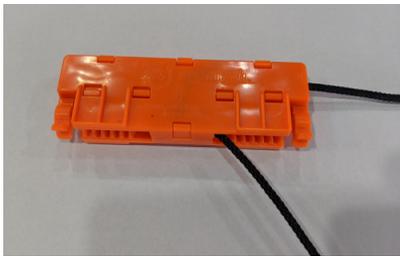

1

Run one string through the channel on the end of the StringLock.



2

Pull the string tight, pulling the StringLock towards one edge of the seat. Press the string into the clamp, locking it in place.




3

Run the second string through the StringLock just like the other one.



4

Pull the loose end of the second string until everything is tight and lock it into place as well.

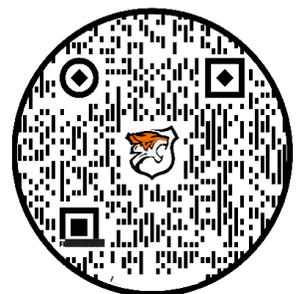

Watch the video
ttcovers.com/stringlock

Install Seat Bottom Cover

Work cover over the lever on the driver's side.



Pull the tabs tight and secure to the velcro.

Press down around headrest mounts to give them a clean, finished look.



Finish by securing the last flap to the velcro under the seat bottom.

Push the flaps at the front between the seat back and bottom.



Last step - install headrest covers with the flap towards the front.

Secure flap inside the back of the headrest.

Tuck the factory carpet flap up inside the seat back.

