

It's not rocket science,  
but following these  
instructions will make  
installing your seat covers  
a lot easier.

We promise.

**PART: T52151**

**PRODUCT: TACTICAL BUCKET SET**

**FITMENT DETAILS: FORD MAVERICK**

**PIECES:** (1) DRIVER'S BACK  
(1) DRIVER'S BOTTOM  
(1) PASSENGER'S BACK  
(1) PASSENGER'S BOTTOM  
(2) HEADREST COVERS  
(1) STRINGLOCK

*Seat Backs & Bottoms have tags signifying Driver or Passenger.  
Ensure airbag patch (same side as the TigerTough tag) goes on  
the outside edge of the seat.*



*Basically, you break it, we buy it.  
Seriously.*

**Your new seat covers are covered by a two-year, unconditional, no B.S. warranty.**

That means that if you manage to abuse them to a point that they can't perform like they're supposed to within two years of when you bought them, we'll make it right. Depending on what is more practical, we'll either repair or replace the damaged cover.

### General care instructions:

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent.  
Drip dry or machine tumble dry on a no heat cycle.  
Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.

# Install Seat Bottom Cover

Slide the seat forward and raising it to the highest position to give you the most amount of working room.

Remove headrest by pressing in the tab on the base of the headrest mount and lifting up



Drop the string closest to the door between the plastic trim and the seat cushion to run it on the inside of the seat frame. Drop the string on the other side down to the floor.

Unhook the flap behind seat that runs under bottom of the seat



Reach around from the back of the seat and secure the strings tightly using the StringLock device (see next page.) The tighter the strings, the better your cover will fit.

Place the seat bottom cover over the seat bottom with long flaps towards the front. Check the tag to make sure you have the right side.





Reach around from the back of the seat and secure the strings tightly using the StringLock device (see next page.) The tighter the strings, the better your cover will fit.

Push the flap between the seat back and seat bottom as shown.



Take the front flaps of the cover and run them between the plastic trim on the front of the seat and under the seat to the back, making sure it is above the seat mechanisms.

# THE STRINGLOCK

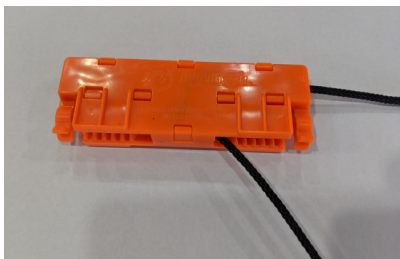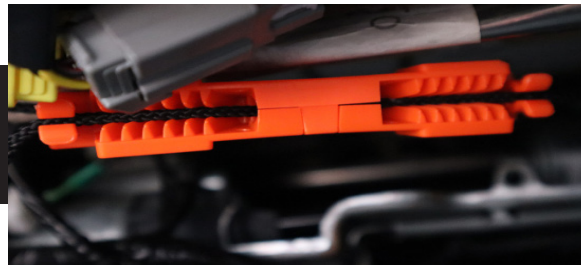


1

Run one string through the channel on the end of the StringLock.




2

Pull the string tight, pulling the StringLock towards one edge of the seat. Press the string into the clamp, locking it in place.

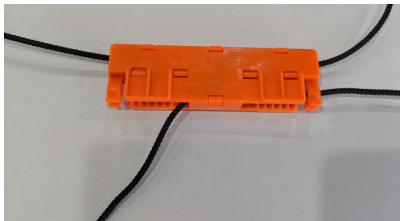


3

Run the second string through the StringLock just like the other one.

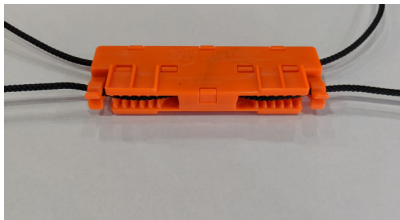

4

Pull the loose end of the second string until everything is tight and lock it into place as well.

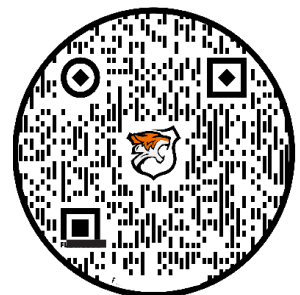

Watch the video  
[ttcovers.com/stringlock](http://ttcovers.com/stringlock)

# Install Seat Bottom Cover

INSTALL VIDEO: [ttcovers.com/55554video](http://ttcovers.com/55554video)

Slide the seat forward and raising it to the highest position to give you the most amount of working room.

Unhook the flap behind seat that runs under bottom of the seat



Drop the string closest to the door between the plastic trim and the seat cushion to run it on the inside of the seat frame. Drop the string on the other side down to the floor.

Place cover over seat bottom



Reach around from the back of the seat and secure the strings tightly using the StringLock device (see next page.) The tighter the strings, the better your cover will fit.

Push the three flaps with velcro on them between the back and the bottom of the seat. Tuck the sides of the cover between the plastic trim on the side of the seat.



Take the front flaps of the cover and run them between the plastic trim on the front of the seat and under the seat to the back, making sure it is above the seat mechanisms.

Tuck the sides of the cover between the plastic trim on the side of the seat.



# Install Seat Bottom Cover

INSTALL VIDEO: [ttcovers.com/55554video](http://ttcovers.com/55554video)

Slide the seat forward and raising it to the highest position to give you the most amount of working room.

Unhook the flap behind seat that runs under bottom of the seat



Drop the string closest to the door between the plastic trim and the seat cushion to run it on the inside of the seat frame. Drop the string on the other side down to the floor.