

It's not rocket science,
but following these
instructions will make
installing your seat covers
a lot easier.

We promise.

PART: 52317

PRODUCT: 40/20/40 SET

**FITMENT DETAILS: 2017-2021 FORD F250-F550 (NOT FOR
XL TRIM) SUPERCAB AND CREW CAB**

**PIECES: (1) DRIVER'S BACK
(1) DRIVER'S BOTTOM
(1) PASSENGER'S BACK
(1) PASSENGER'S BOTTOM
(1) CONSOLE TOP
(1) CONSOLE BOTTOM
(3) HEADREST COVERS**

*Seat Backs & Bottoms have tags signifying Driver or Passenger.
Ensure airbag patch (same side as the TigerTough tag) goes on
the outside edge of the seat.*



Basically, you break it, we buy it.
Seriously.

Your new seat covers are covered by a two-year, unconditional, no B.S. warranty.

That means that if you manage to abuse them to a point that they can't perform like they're supposed to within two years of when you bought them, we'll make it right. Depending on what is more practical, we'll either repair or replace the damaged cover.

General care instructions:

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent.
Drip dry or machine tumble dry on a no heat cycle.
Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.

1 - Preparation



Unhook from seat bottom.

Pull down to detach from seat bottom.

- 1.1 - Slide seat forward and raise to highest position, if possible.
- 1.2 - Remove headrest by pressing in tabs at base of headrest and pulling up
- 1.3 - Pull yellow plug out of bottom of seat.
- 1.4 - Unhook elastic straps from under seat bottom.

For assistance with installation, call us at 507.246.3545



2 - Install Seat Bottom Cover





- ❑ 2.1 - Put cover over seat bottom.
- ❑ 2.2 - Tuck outside of cover behind plastic trim. Tuck inside of cover between seat bottom and center console.
- ❑ 2.3 - Tuck outside string between seat bottom and trim, where the back and bottom meet. Inside string goes down and under seat. Strings must run in front of rear seat mounts.
- ❑ 2.4 - Pull strings tight.
- ❑ 2.5 - Tie a loop in one string. Run the other string through the loop, pull tight, and tie string back on itself. It is important to pull tight as this is what keeps your cover from shifting.
- ❑ 2.6 - Push top flap between seat back and seat bottom. Slits in cover line up with wires in seat back.
- ❑ 2.7 - Run front flap over seat adjustment levers, wires, and brackets.
- ❑ 2.8 - Pull front flap tight and fasten to Velcro on top flap.

3 - Install Seat Back Cover




- 3.1 - Turn seat back cover 3/4 of the way inside out and pull over seat back.
- 3.2 - Line holes in cover up with headrest holes and work holes around plastic trim.
- 3.3 - Continue pulling the cover down over the seat, unrolling it as you go.
- 3.4 - Push front flap between seat back and seat bottom.
- 3.5 - Pull front flap tight and fasten to Velcro on seat back.
- 3.6 - Long flap on rear of seat back fastens to Velcro on underside of seat bottom cover.

4 - Install Headrest Cover

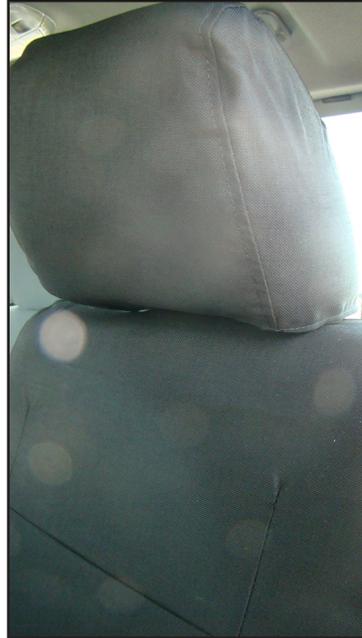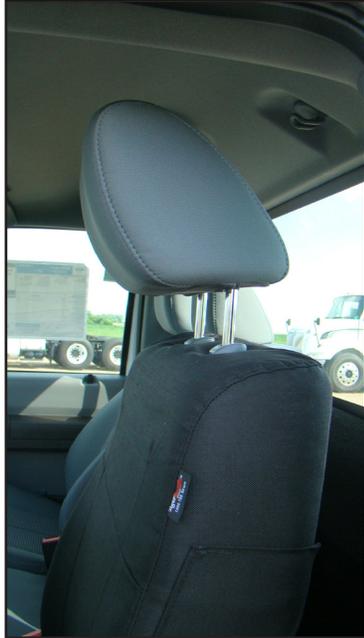



- 4.1 - Put headrest back in seat by pressing plastic tabs and pushing down on headrest.
- 4.2 - Pull cover over head rest with “loop” Velcro in front and “hook” Velcro in rear.
- 4.3 - Fasten Velcro tabs together under headrest.

5 - Install Center Console Back

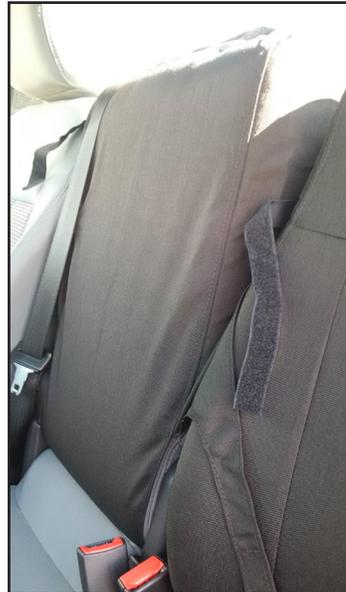

- 5.1 - Remove headrest by pressing tabs at base of headrest and pulling up.
- 5.2 - Lay console down.
- 5.3 - Open console and pull cover over lid, making sure hole in cover lines up with handle.
- 5.4 - Close lid and tip console up.
- 5.5 - Pull cover between back and bottom.

5 - Install Center Console Back, cont'd

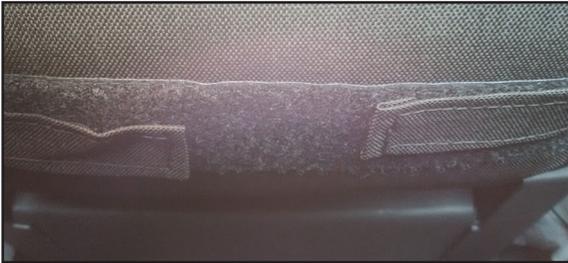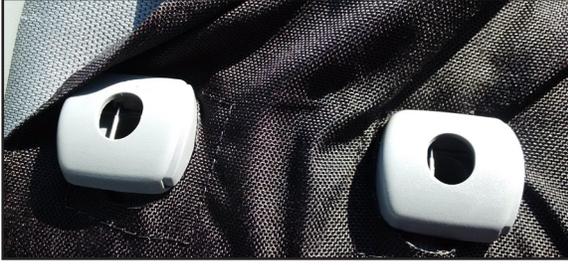

- 5.6 - Pull cover up & over back, working holes around plastic trim for headrest.
- 5.7 - Fasten Velcro flap around seat belt.
- 5.8 - Lay console down.
- 5.9 - Fasten side straps to rear of console.
- 5.10 - Open console and fasten side straps behind latch hole.

6 - Install Center Console Bottom



- 6.1 - Tip seat bottom up and pull cover over it.
- 6.2 - Pull side flaps tight and fasten to factory upholstery under seat bottom.
- 6.3 - Push top flap between seat back and seat bottom.
- 6.4 - Pull flap tight and fasten to Velcro on bottom of cover.

7 - Install Headrest Cover



- 7.1 - Put headrest back in seat by pressing plastic tabs and pushing down on headrest.
- 7.2 - Pull cover over headrest with "loop" Velcro in front and "hook" Velcro in rear.
- 7.3 - Fasten Velcro tabs together under headrest.